


10. Route the direction signal harness for the rear lamps down the dash and along the main wiring harness on the left side to the rear using existing clips.

On the underbody at a position approximately below driver's seat are connectors which join the main harness to the main harness extension. Make wiring changes as shown below.

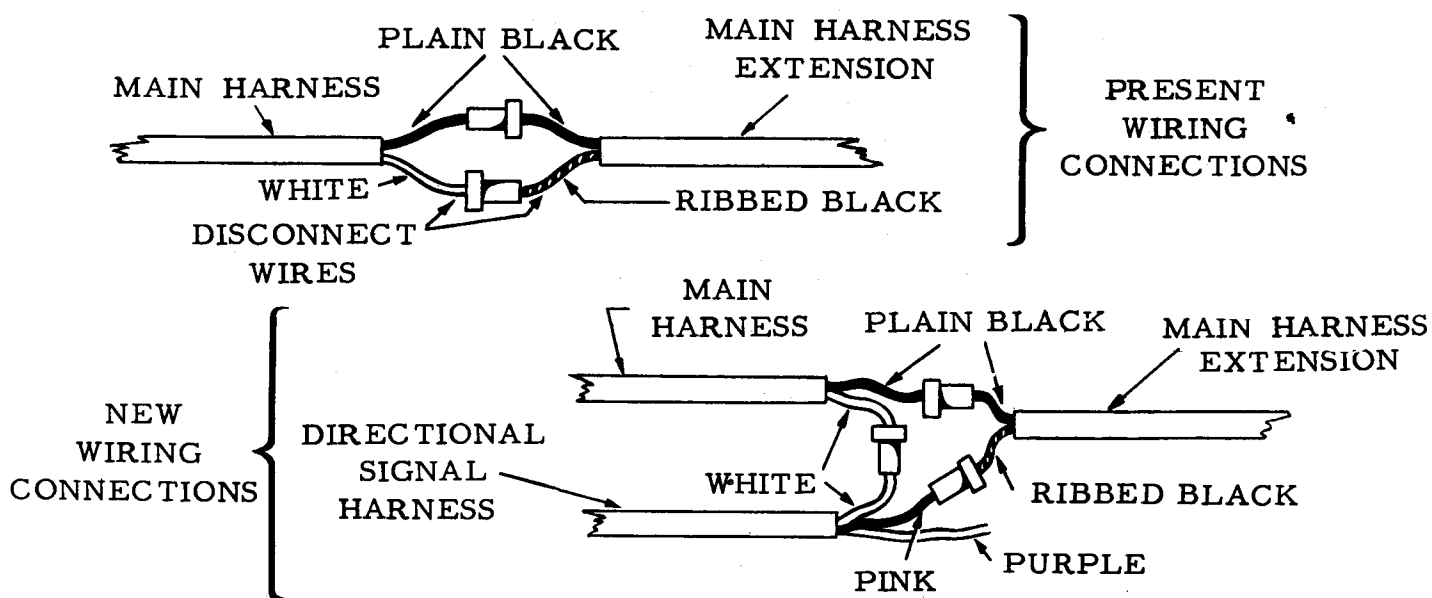

11. Disconnect the white wire from the ribbed black wire of the main harness and connect it to the white wire of the directional signal harness.

Connect the ribbed black wire to the pink wire of directional signal harness.

Route purple wire of directional signal harness to rear.